

DUMETA®

High quality positioning equipment

Welding rotators

Rollers adjustable by handwheel

D-DWR

The D-DWR welding rotators are suitable for the positioning and turning of small containers and pipes. Using a welding rotator to rotate your workpieces will significantly reduce your production time and enhance work safety and ergonomics.


The D-DWR welding rotator can be supplied with a capacity from 1.000 kg and to 3.000 kg.

Features


- Solid polyurethane rollers applicable for max. 90°C
- Manually adjustable to workpiece diameter
- 230V power supply
- Switch for cw/ccw rotation
- Variable rotational speed
- Compact construction
- Incl. foot pedal

Optional


- Foot pedal for adjustable speed
- Radio remote control

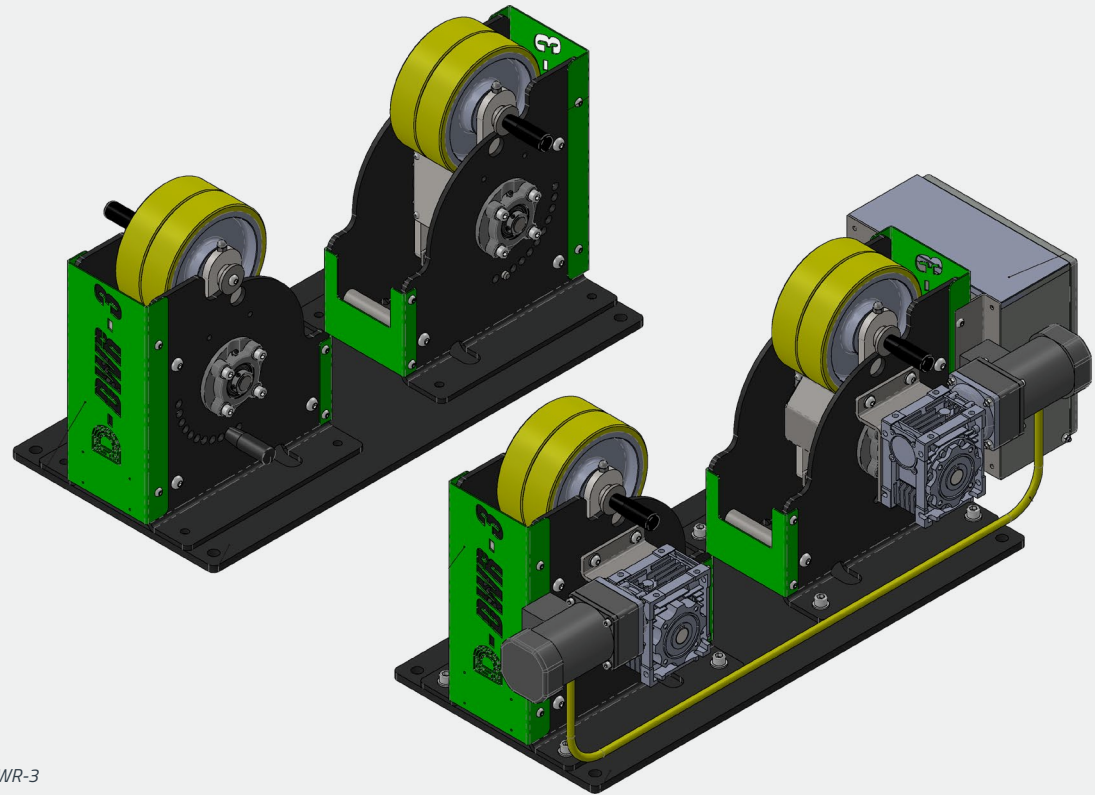

D-DWR-3

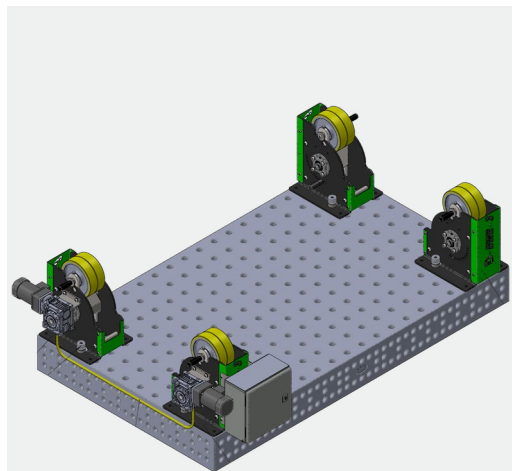

D-DWR-3

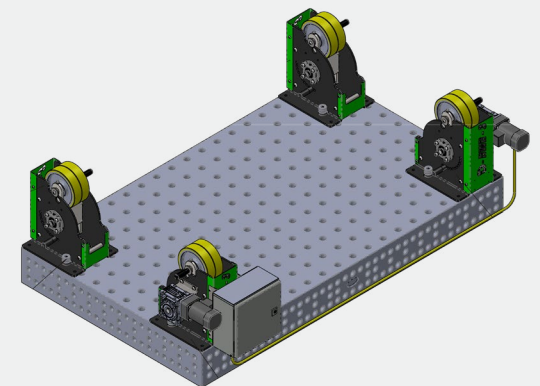

D-DWR-3

DUMETA®

High quality positioning equipment

Welding rotators

Rollers adjustable by handwheel

D-DWR

Technical specifications

Model	D-DWR-1	D-DWR-3
Max. rotational capacity drive unit (kg)	1.000	3.000
Max. load capacity drive unit (kg)	500	1.500
Max. load capacity idler (kg)	500	1.500
Rollers Ø x Br. (mm)	50 x 200	100 x 200
Rotation speed (mm/min)	100 - 1.000	100 - 1.000
Workpiece (Ø mm)	20-800	20-1.500
Motor Power (kW)	0,12	0,12
Max. workpiece temperature (°C)	95	95
Power supply	230V, 50/60Hz	230V, 50/60Hz
Dual Foot pedal (start-stop/left-right)	Single foot pedal	Included
Remote control (by wire)	-	Included

All information is subject to printing-, type errors and modifications.



D-DWR-3