

DUMETA®

High quality positioning equipment

Welding rotators

Fixed working height regardless
of workpiece diameter

D-DWR-VE-5

With the D-DWR-VE-5 welding rotator of the DWR-series the centre height of the product always remains at the ideal working height. This contributes to an ergonomic working posture of the welder. Moreover, the welding rotator can be combined with a vertical manipulator from our product portfolio. The machine enables you to significantly reduce production time and to improve work safety.

It is also possible to adjust this rotator according to customer requirements.

Features

- Made in the Netherlands
- Compact construction
- Stepless speed control
- PU-rollers applicable for max. 90°C
- Regardless of workpiece diameter fixed working height
- Incl. remote control and foot pedal
- CE certified

Optional

- Foot pedal for adjustable speed
- Radio remote control
- Fixed version or movable on rails
- Manual height adjustment
- Station for remote control and footpedal



D-DWR-VE-5-M




DUMETA®

High quality positioning equipment

Welding rotators

Fixed working height regardless
of workpiece diameter

D-DWR-VE-5

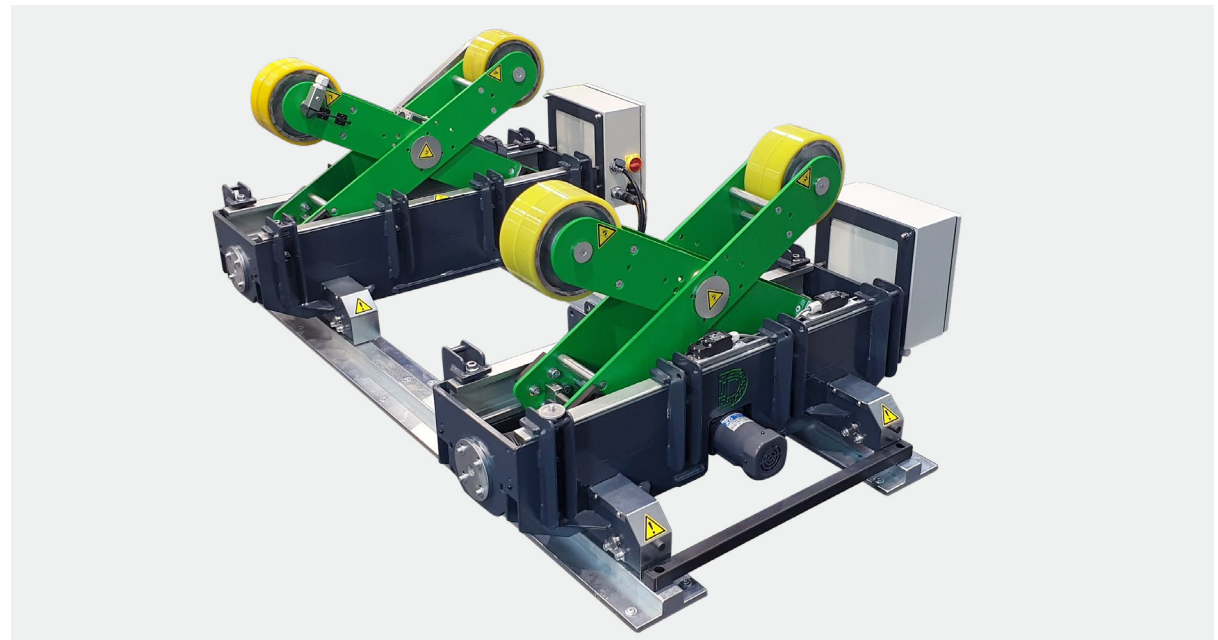

Technical specifications

Model	D-DWR-VE-5	D-DWR-VE-5-M
Max. rotating capacity drive unit (kg)	5000	5000
Max. load drive unit (kg)	2500	2500
Max. load capacity Idler (kg)	2500	2500
Rollers W x Ø (mm)	100 x 200	100 x 200
Rotation speed (mm/min)	100 - 1000	100 - 1000
Workpiece (Ø mm)	80-900	80-900
Centre height workpiece (mm)	900	900
Motor Power (kW)	0,12	0,12
Max. workpiece temperature (°C)	95	95
Power supply	230V, 50/60 Hz	230V, 50/60 Hz
Double foot pedal (start-stop/left-right)	Included	Included
Remote control (by wire)	Included	Included
Movable on rails (manually)	No	Yes

All information is subject to printing-, type errors and modifications.

